


# IR Blaster/Repeater 紅外線訊號轉發器

## 1. Standard item:


P/N: FGM-USB-OSE3BL4(1)-A600LM(1)

Included IR LED driver , Forward pulse current is about 80mA ~ 100mA  
內含IR LED驅動電路, LED脈衝電流約80mA ~ 100mA

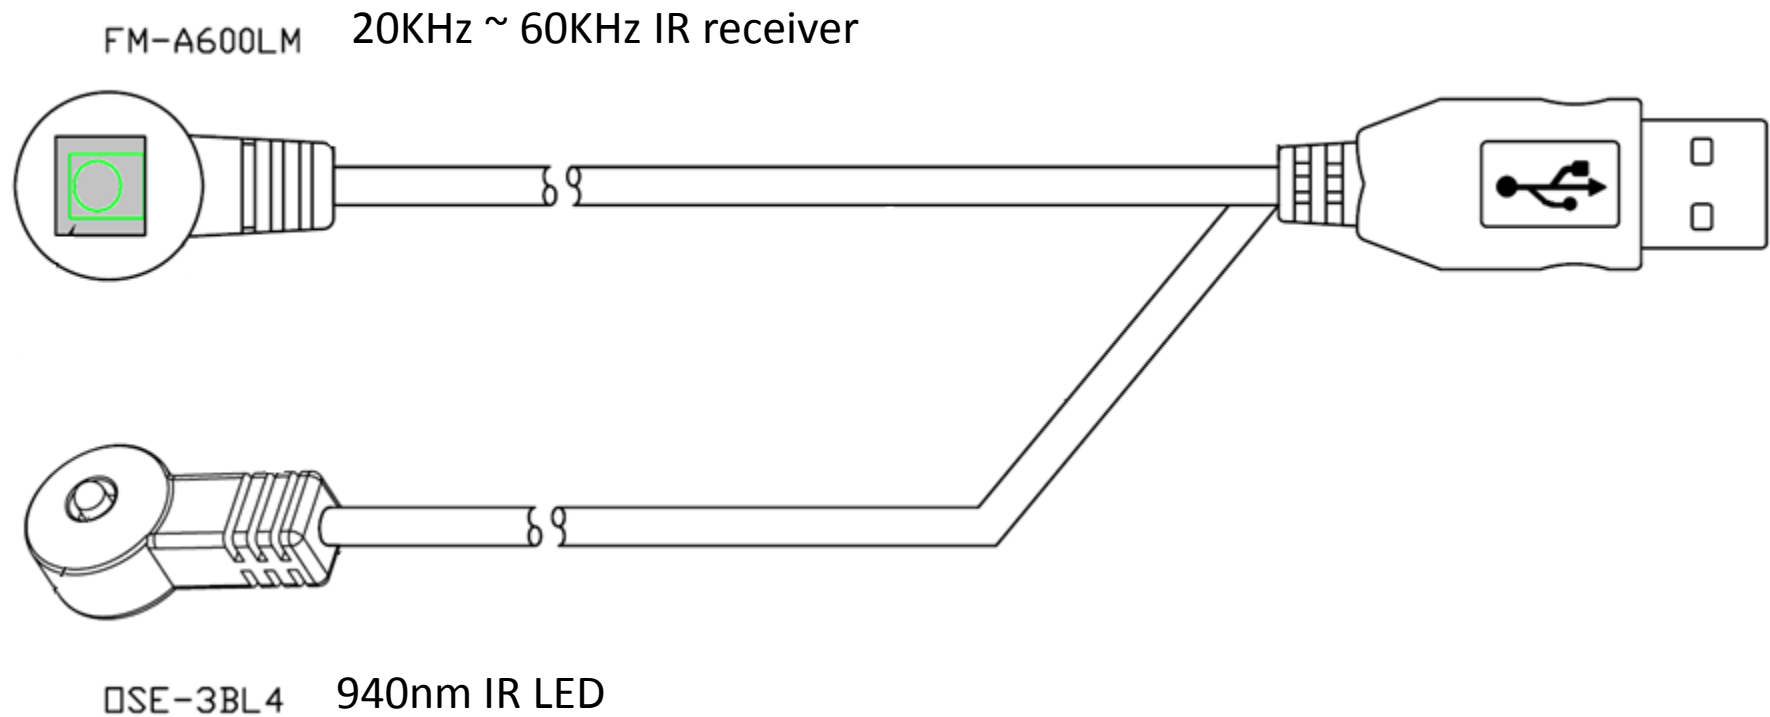

2. Optional item:

P/N: FGM-USB(0.15)K-Jack35

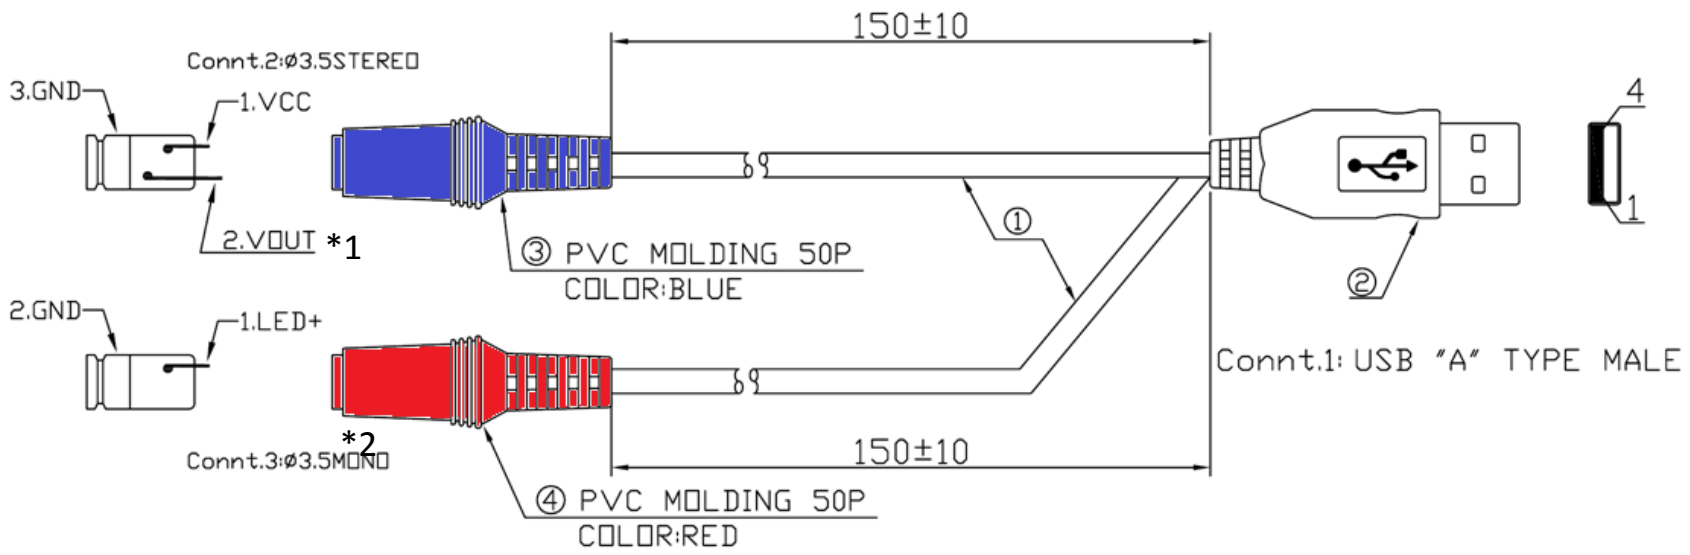


Note :


- \*1 The FGM-351K-A600LM is recommended for connecting
- \*2 The FGM-351K-OSE3BL4 is recommended for connecting

2. Optional item:

P/N: FGM-351K-A600LM

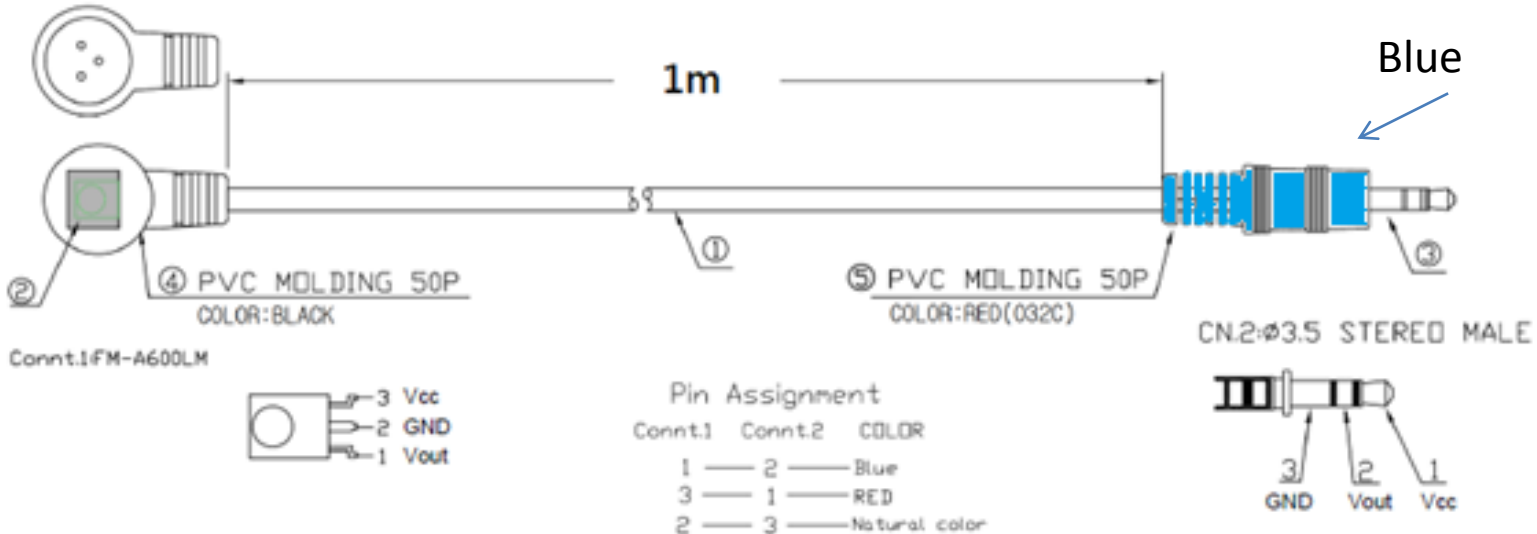

P/N: FGM-351K-OSE3BL4

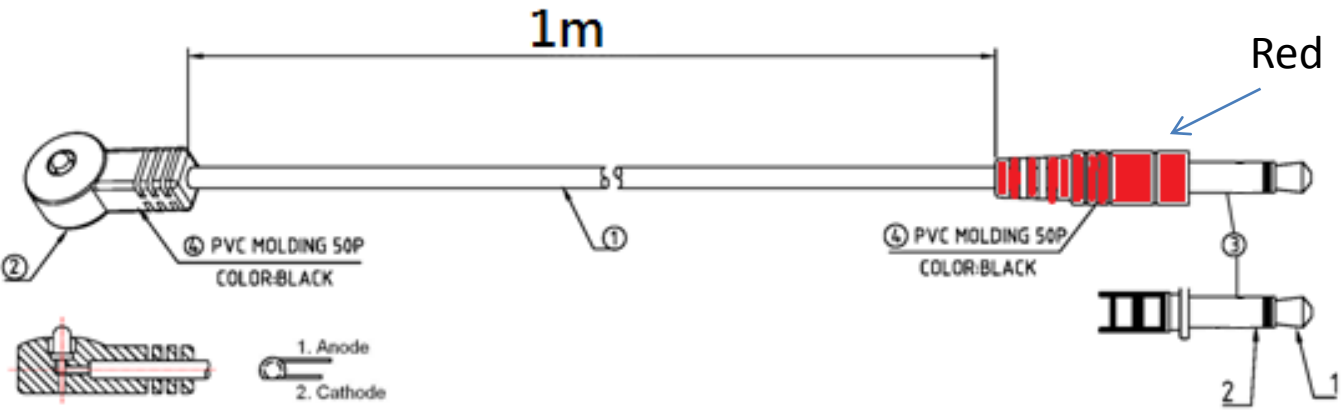

紅外線訊號轉發器  
IR Blaster/Repeater

接收波長: 850nm ~ 940nm  
Receive wavelength: 850nm ~ 940nm

接收頻率載波範圍: 20KHz ~ 60KHz  
Receive Carrier Frequency Range: 20KHz ~ 60KHz

IR LED發射波長/功率: 940nm/16mW/sr  
IR LED radiant peak wavelength / intensity: 940nm/16mW/sr

線長: 0.5m ~ 5m(客戶制定)  
Cable length: 0.5m ~ 5m( customized available)

工作電壓: DC 5V +/- 0.5V  
Operating Voltage: DC 5V +/-0.5V

靜態電流: <1mA  
Standby current: < 1mA

工作電流: < 100mA  
Operating current: <100mA

Application  
應用

Connect to TV/STB USB port/連結至電視/機頂盒USB埠

